

Swidget™ Z-Wave Control + Guide Light Insert

The Swidget Platform is a modular Smart Home enabled system comprised of Wall Switches and Outlets. The modularity allows a multitude of different functional Inserts to be installed, creating unique new functionalities including smart Z-Wave control, power monitoring, sounds, light, and sensors.


FEATURES

Z-Wave

- Z-Wave Plus Certified
- User replaceable – electrician not required
- Independent power monitoring on each circuit
- Works with SmartThings, Hubitat, Vera, Wink, and more

Guide Light

- Basic night light functionality
- Automatic light sensor trigger
- High Efficiency LED

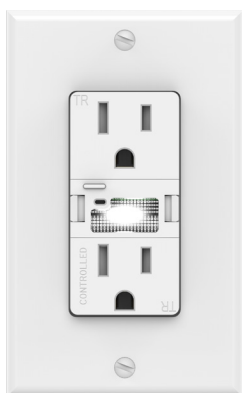

DESCRIPTION

The Swidget product line has been developed to support the easy integration of Home Automation and Smart Home markets with unique and flexible solutions. Designed to be integrated with any major Smart Home protocol, the Swidget Z-Wave Control + Guide Light transforms the Swidget Outlet or Switch into a Z-Wave smart device. Supported by your Z-Wave Hub, you will have the ability to add your Swidget and all its functions to your Z-Wave portal.

In a typical installation, the Swidget device will appear as two endpoints in your Z-Wave network, the first being a binary switch and version 2 meter, and the second being a version 2 meter only. Endpoint 1 provides basic on/off capabilities and power monitoring for the controlled receptacle. Endpoint 2 provides power monitoring capabilities for the always-on receptacle.

The Guide Light addition provides all the features of a standard night light, using high efficiency LED technology to brighten any dark room or space safely.

As all Swidget Inserts operate on the Class 2 certified interface, an electrician is NOT required for installation or removal.

SPECIFICATIONS

Product Number	ZW002RWA
Wireless Band	908.4MHz
Support Z-Wave Security	S2 Unauthenticated
Z-Wave Repeater	Yes - Node Repeater
Z-Wave Devices Types	SWITCH BINARY (0x25), two METER V2 (0x32)
Multichannel Command Class	Supported – Endpoint 1 : Power Switch Binary, Endpoint 2: Simple Meter
Device Compatibility	SmartThings, Hubitat, Vera, Generic Z-Wave support
Association Information	Supports Lifeline Association for Device Reset Locally and periodic Meter V2 Reports
LED Color	Warm White
LED Intensity Specification	1960mcd@20mA
Trigger	Automated light sensor
Environmental	Indoor installation only
Operating Temperature	14F to 104F (-10C to 40C)

REVISION HISTORY

Revision Number	Date	Comment
000	2019/09/27	Initial release

SALES

Corporate Office
6-677 Innovation Drive
Kingston, ON K7K 7E6
<https://www.swidget.com>